

## DS-2CS58C0T-ITS

1MP IR Mobile Dome HDTVI Camera



### Key Features:

- 1.0MP Progressive Scan CMOS
- Turbo HD output, up to 720P resolution
- 0.1Lux @ (F1.2, AGC ON), 0 Lux with IR
- Adopt wide-angle lens with wider monitoring coverage
- Support electronic shutter and AGC
- Patented universal regulating mechanism, easy to adjust
- Anti-vibration design and aviation port for mobile environments
- Built-in microphone
- IP65


### Application:

Suitable for mobile environments.

### Order Model:

DS-2CS58C0T-ITS

### Dimensions:

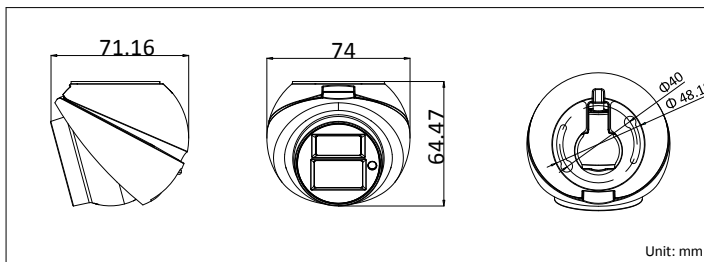

### Specification:

Model	DS-2CS58C0T-ITS
Parameter	1MP IR Mobile Dome Camera
<b>Camera</b>	
Image Sensor	1.0MP Progressive Scan CMOS
Resolution	1280(H)×800(V)
Min. Illumination	0.1Lux @ (F1.2, AGC ON), 0 Lux with IR
Shutter Time	1/25s to 1/50,000s
Lens	2.1mm(2.8mm/3.6mm optional)
Lens Mount	M12
Angle Adjustment	Pan:0° - 50°; Tilt:0° - 50°; Rotation:0° - 360°
Day & Night	Electronic
Horizontal Definition	950TVL
Synchronization	Internal
Video Output	Aviation port
Audio Input	Built-in Mic
Audio Output	1-ch audio interface(Aviation plug)
Frame Rate	720p@25fps/30fps
Function	Mirror(PTZ control)
<b>General</b>	
Working Temperature/Humidity	-40°C~75°C, Humidity 90% or less (non-condensing)
Power Supply	DC6V-16V
Power Consumption	3.5W MAX
Ingress Protection	IP65(Indoor use)
IR Range	20-30m
Dimension(mm)	74×64.47×71.16
Weight	400g